


An Overview of Functions in the *metafor* Package

last updated: Aug 25 2015

(not all functions documented)

given the required data (e.g., means, SDs, and group sizes; counts for 2x2 tables; correlations and sample sizes), calculate the desired effect size or outcome measure for the meta-analysis (e.g., raw or standardized mean differences, log odds ratios, log risk ratios, risk differences, r-to-z transformed correlations, ...)

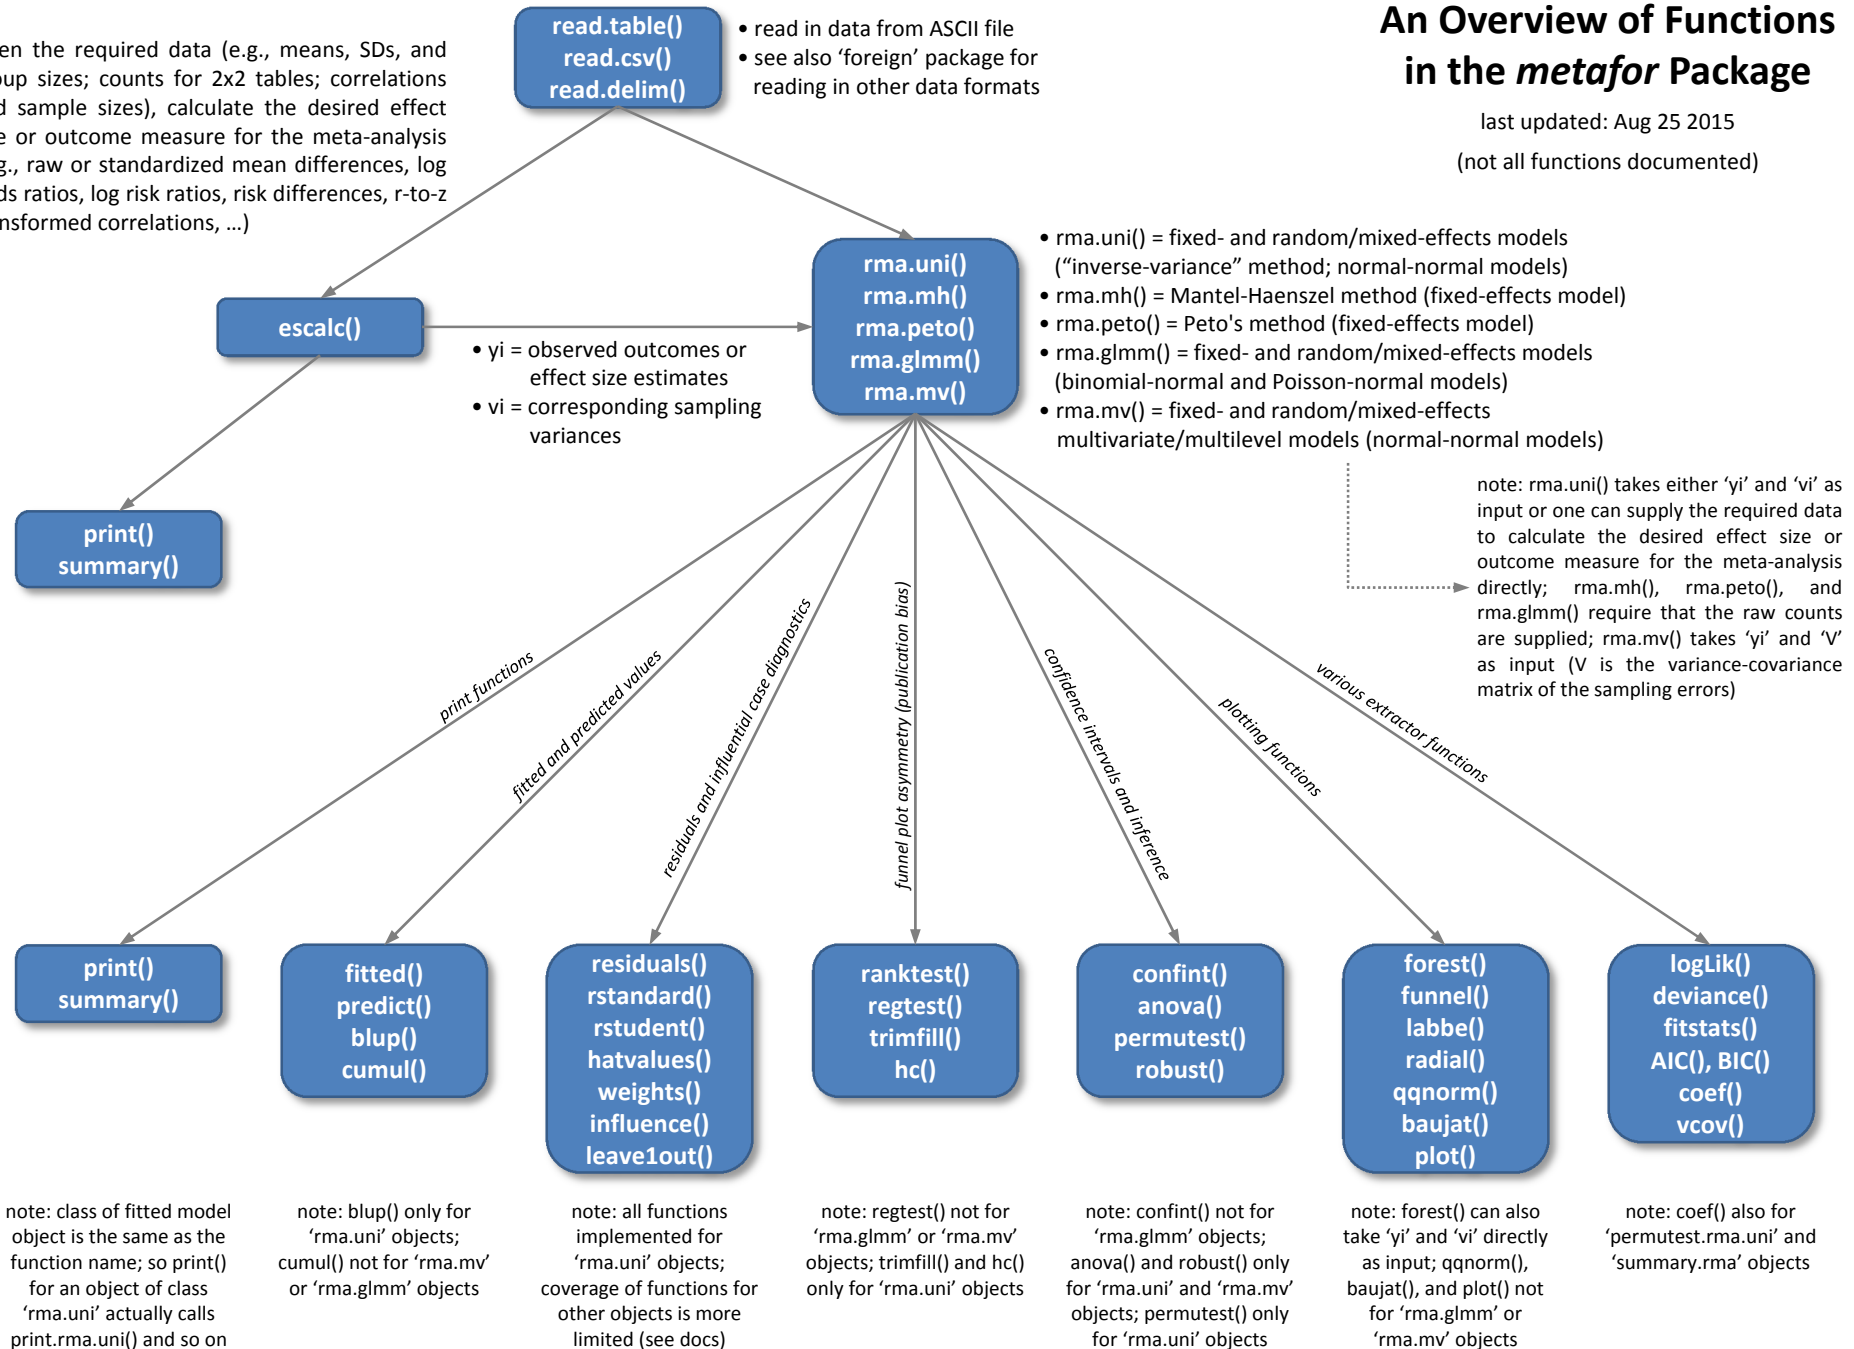

note: restrictions may change with future updates